


Technical data sheet

Part Number **1468-6**

Digital Video Broadcasting

Band IV-V 250W UHF/DVB 6 Poles B. P. Filter with Cross Coupling - Uncr. Mask

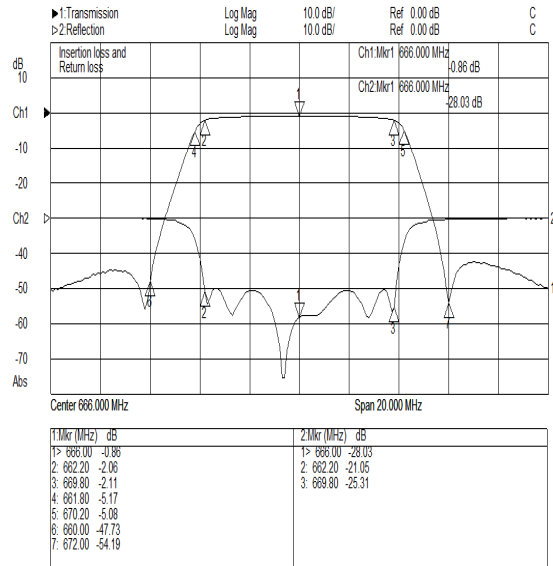

Mechanical Characteristics

Connections	N or DIN 7/16
Overall dimensions [WxDxH] [mm.]	210x113x330
Maximum Operating Temperature [C°]	70
Temperature Stability [kHz / K]	≤ 2
Weight [kg.]	7

Electrical Characteristics

Frequency Range [MHz]	470 ÷ 862
Insertion Loss [dB] @ Fo	< 0.9
Insertion Loss [dB] @ Fo ± 3.805 MHz	< 2.2
Attenuation @ Fo ± 4.2 MHz [dB]	> 5
Attenuation @ Fo ± 6 MHz [dB]	>40
Attenuation @ Fo ± 12 MHz [dB]	> 55
Maximum amplitude variation [dB]	1.3
Return loss [dB]	> 20
Input/Output Impedance [Ohm]	50
Maximum Input Power [W]	250 (r.m.s.)
Max. Group Delay Variation [ns]	300

