


Band IV-V 750W UHF/DVB 6 Poles B. P. Filter with dual Cross Coupling Critical / Uncritical Mask

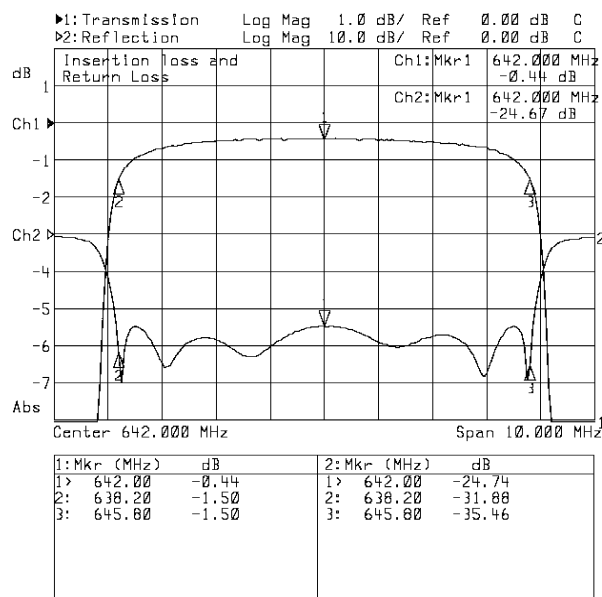

Mechanical Characteristics

Connections	DIN 7/16 or EIA 7/8"
Overall dimensions [WxDxH] [mm.]	177x294x400
Maximum Operating Temperature [C°]	70
Temperature Stability [kHz / K]	≤ 2
Weight [kg.]	12

Electrical Characteristics

Frequency Range [MHz]	470 ÷ 862
Insertion Loss [dB] @ Fo	< 0.45
Insertion Loss [dB] @ Fo ± 3.805 MHz	< 1.55
Attenuation @ Fo ± 4.2 MHz [dB]	> 12
Attenuation @ Fo ± 6 MHz [dB]	> 24
Attenuation @ Fo ± 12 MHz [dB]	> 36
Maximum amplitude variation [dB]	1.1
Return loss [dB]	> 22
Input/Output Impedance [Ohm]	50
Maximum Input Power [W]	750 (r.m.s.)
Max. Group Delay Variation [ns]	300

