


Technical data sheet

Part Number **1494-6-S2**

Star type configuration

Band IV-V 2x500W UHF/DVB Star Point Combiner - Uncritical Mask -

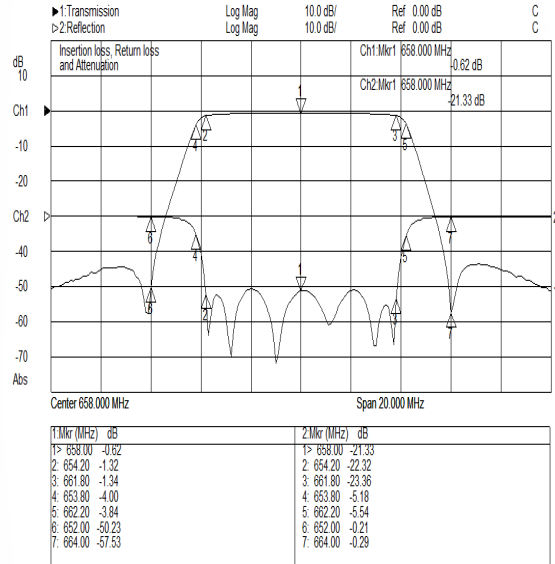

Mechanical Characteristics


Connections

Input	DIN 7/16
output	EIA 7/8"

Overall dimensions [WxDxH] [mm.]	670x200x420
Maximum Operating Temperature [C°]	70
Weight [kg.]	30

Electrical Characteristics

Frequency Range [MHz]	470 ÷ 862
Insertion Loss [dB] @ V.C.	0.75
Return loss by Channels [dB]	20
Input/Output Impedance [Ohm]	50
Minimum Distance Between Channels	2 guard channel
Insulation Between Channels [dB]	30
Maximum Channel Input Power [W]	500 DTV
Maximum Output Power [W]	1000 DTV
Max. Group Delay Variation [ns]	300

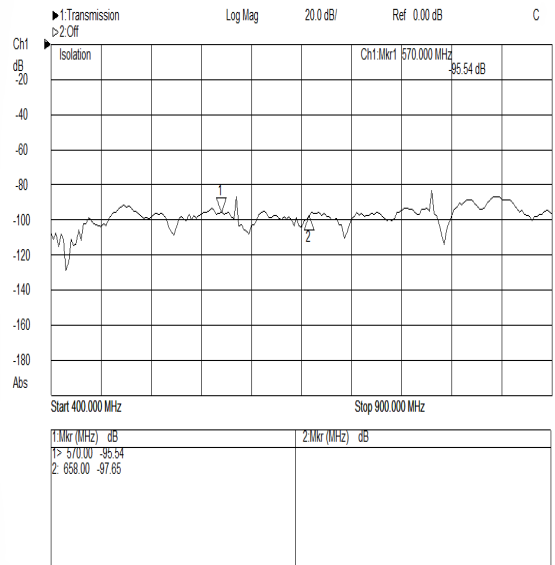

All data contained in this technical sheet are not binding and can be changed without notice

Data updating 28/01/2013

Delta Meccanica s.r.l.
 Via Fontanelle di Bardano, 20 - 05019 Orvieto (TR) - Italy
 Phone +39 0763 316222 - Fax +39 0763 316267
 e-mail info@deltameccanica.com - web www.deltameccanica.com