




In term of law DELTA MECCANICA s.r.l. claims the property of this drawing. Any reproduction in any form without our authorization is forbidden
This document cannot be considered to be a contractual specification. The informations given herein may be modified without notice due to product improvement or further development.

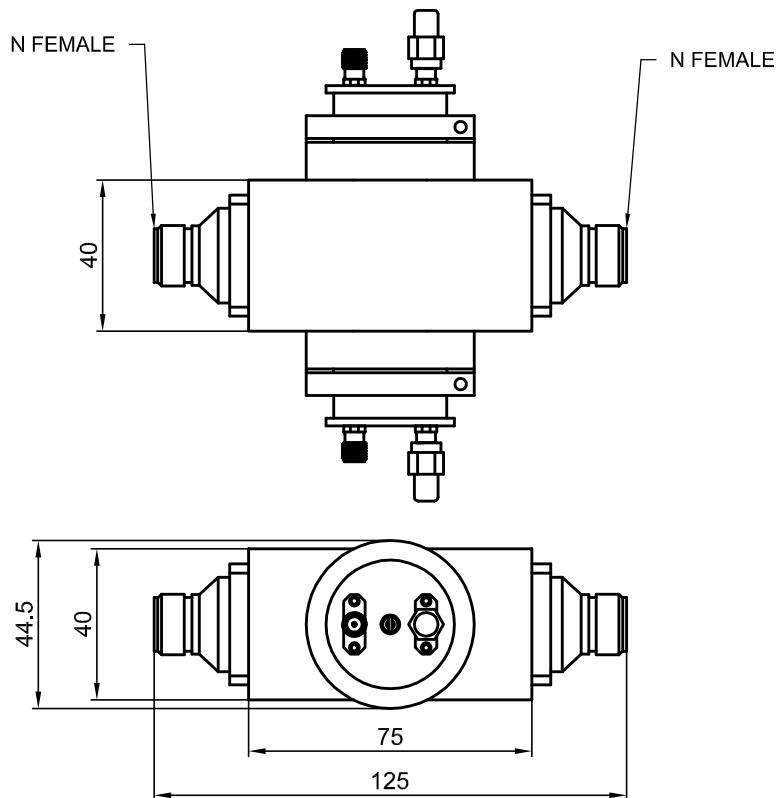

Electrical Characteristics		
Frequency Range	FM Band	87.5 + 108 MHz
	VHF BIII	170 + 230 MHz
	UHF BIV-V	470 + 862 MHz
Insertion Loss by Channels		< 0.05 dB
Return Loss by ch. (VSWR)		> 30 dB (≤ 1.06)
Input/Output Impedance		50 Ω
Coupling Factor		-35 + -58dB (*)
Amplitude variation	FM Band	± 1 dB
	VHF BIII	± 1.5 dB
	UHF BIV-V	± 3 dB
Directivity		> 30 dB

(*) To be define at order confirmation

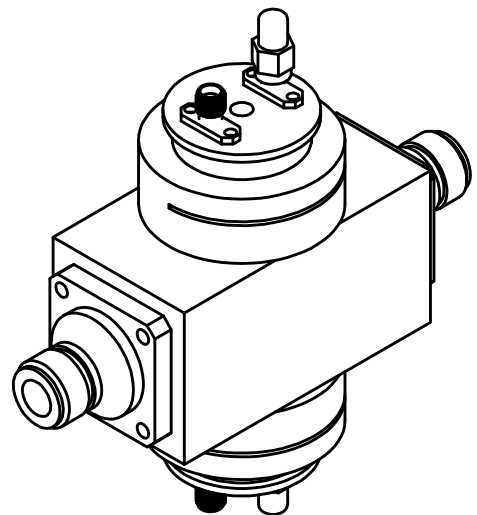

dwg.	quality control	date	scale		A4	sheet
Adami		24/11/15	1:2		210X297	1/1
δ DELTA Meccanica s.r.l.	TITLE					REV.
	N DIRECTIONAL COUPLER WITH TWO SMB PROBES					
	CODE					
	1319-02-SMA					