


PART NUMBER: 1448-4-N-EP

TITLE: 750W VHF/DTV BAND PASS FILTER EXTRACT POLES


UNCRITICAL MASK

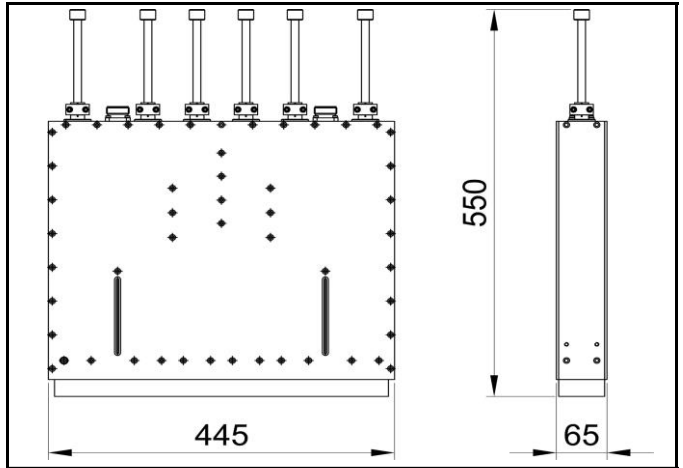

Tunable within whole VHF range.
For 6,7 MHz channel bandwidth.
DC block.
Different connectors on request.

Connectors:	DIN 7/16
Max operating temperature (C°):	70
Temperature stability (kHz/K):	< 2
Weight (kg):	13

DVB-T @ 7 MHz	
Frequency Range (MHz)	170 ÷ 240
Insertion Loss (dB) @ fo	< 0.4
Insertion Loss (dB) @ fo ± 3.3 MHz	< 0.9
Attenuation @ fo ± 3.7 MHz (dB)	> 5
Attenuation @ fo ± 5.25 MHz (dB)	> 16
Attenuation @ fo ± 10.5 MHz (dB)	> 38
Maximum Amplitude Variation (dB)	0.5
Return Loss (dB)	> 24
Input/Output Impedance (Ohm)	50
Maximum Input Power (W)	750 (RMS)
Max. Group Delay Variation (ns)	200

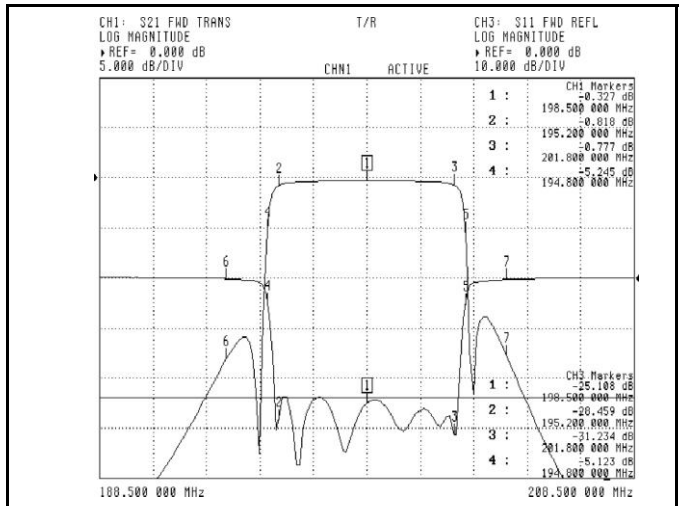

ISDB-T @ 6 MHz	
Frequency Range (MHz)	
Insertion Loss (dB) @ fo	
Insertion Loss (dB) @ fo ± 2.79 MHz	
Attenuation @ fo ± 3.15 MHz (dB)	
Attenuation @ fo ± 4.5 MHz (dB)	
Attenuation @ fo ± 9 MHz (dB)	
Maximum Amplitude Variation (dB)	
Return Loss (dB)	
Input/Output Impedance (Ohm)	
Maximum Input Power (W)	
Max. Group Delay Variation (ns)	

ATSC @ 6 MHz	
Frequency Range (MHz)	170 ÷ 240
Insertion Loss (dB) @ fo	< 0.45
Insertion Loss (dB) @ fo ± 2.9 MHz	< 0.8
Attenuation @ fo ± 3.5 MHz (dB)	> 10
Attenuation @ fo ± 6 MHz (dB)	> 24
Attenuation @ fo ± 9 MHz (dB)	> 36
Maximum Amplitude Variation (dB)	0.35
Return Loss (dB)	> 24
Input/Output Impedance (Ohm)	50
Maximum Input Power (W)	750 (RMS)
Max. Group Delay Variation (ns)	150