



PART NUMBER: 3x1425-3-DP
TITLE: 4 INPUTS UHF DOUBLE BRIDGE CONFIGURATION

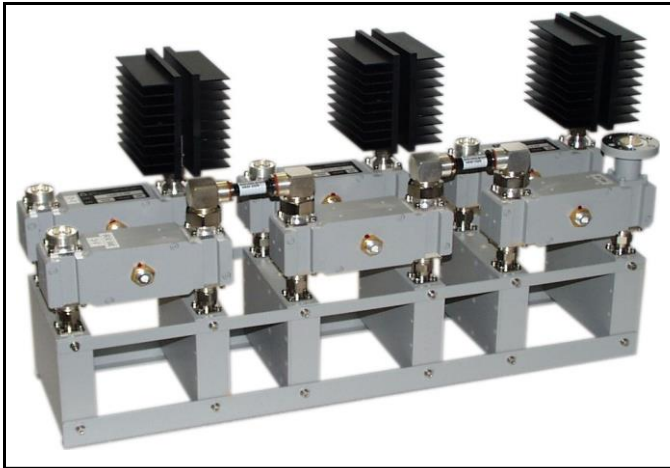

Tunable within whole UHF range.
 For 6,7,8 MHz channel bandwidth.
 Different connectors on request.

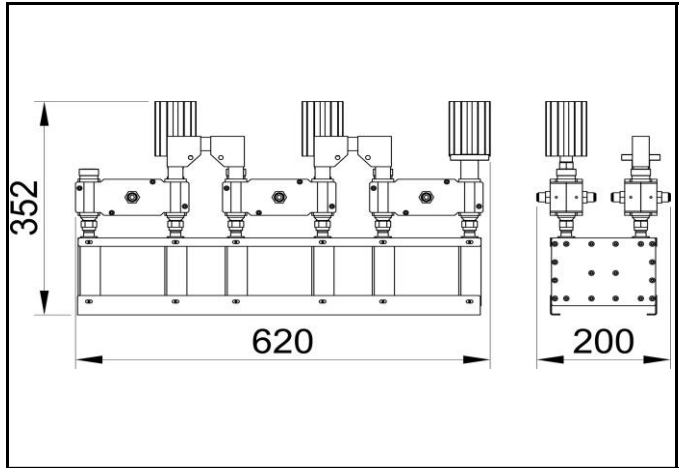

Input Connectors: DIN 7/16
Output Connectors: EIA 7/8"
Temperature range (C°): -10 ÷ 50
Weight (kg): 18

DVB-T @ 8 MHz	
Frequency range (MHz)	470 ÷ 862
Bandwidth (MHz)	6 ÷ 8
Insertion loss (dB)	< 0.7
Return loss (dB)	> 26
Input/output impedance (Ohm)	50
Min. distance between channels	1 guard channel
Isolation between channels (dB)	> 30
Maximum input power (W)	300 ATV-200 DTV
Maximum output power (W)	1200 ATV-800 DTV

