


PART NUMBER: 1423-S2
TITLE: 2x600W ATV STAR COMBINER
 3 CAVITIES BAND PASS FILTER

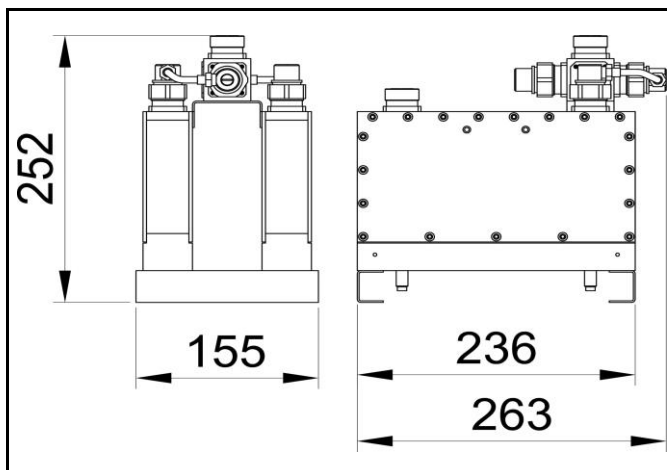

Tunable within whole UHF range.
 For 6,7,8 MHz channel bandwidth.
 Different connectors on request.

Input Connectors: DIN 7/16
Output Connectors: DIN 7/16
Temperature range (C°): -10 ÷ 50
Weight (kg): 8

DVB-T @ 8 MHz	
Frequency range (MHz)	470 ÷ 862
Insertion loss (dB) @ F0	< 0.4
Return loss by channels (dB)	> 26
Input/Output Impedance (Ohm)	50
Min. dist. between channels (dB)	2 guard channels
Insulation between channels (dB)	> 30
Maximum channel input power (W)	300
Maximum output power (W)	600
Maximum group delay variation (ns)	10

